

# EECS 20, First Midterm Exam

February 23, 2001

Last name:

First name:


Student ID:

Lab user ID:

Email:

Lab section:

## Problem 1. (20 points)

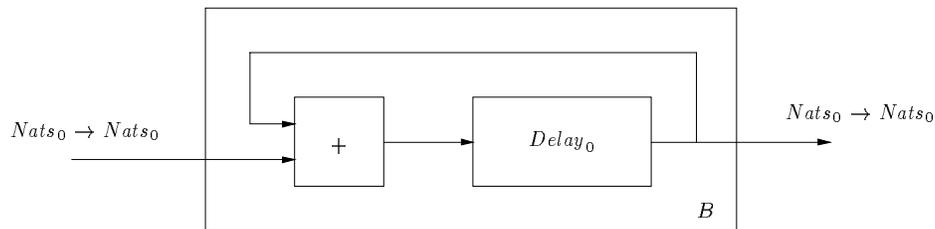

If the first four inputs are 3, 3, 0, 1, what are the first four outputs of  $B$ ?

0, 3, 6, 6

Which of the following terms characterize the system  $B$  (answer Yes or No for each):

reactive      Yes

discrete-time      Yes

memory-free      No

causal      Yes

finite-state      No

deterministic      Yes

Complete the following:

$B: [Nats_0 \rightarrow Nats_0] \rightarrow [Nats_0 \rightarrow Nats_0]$  such that  $\forall x \in [Nats_0 \rightarrow Nats_0], \forall y \in Nats_0,$   
 $(B(x))(y) = \sum_{0 \leq z < y} x(z).$

**Problem 2.** (30 points)


Draw the transition diagram of a state machine that implements the nondeterministic system  $A \subseteq [Nats_0 \rightarrow Bins] \times [Nats_0 \rightarrow Bins_\perp]$  such that  $\forall x \in [Nats_0 \rightarrow Bins], \forall y \in [Nats_0 \rightarrow Bins_\perp], (x, y) \in A$  iff

- (1)  $y(0) = \perp$ ;
- (2)  $\forall z \in Nats$ , either  $y(z) = x(z - 1)$  or  $y(z) = \perp$ ; and
- (3)  $\forall z \in Nats$ , if  $y(z) = \perp$  then  $y(z - 1) \neq \perp$ .

Note that  $A$  is a lossy channel with unit delay that never drops two inputs in a row.


States:

- 0     previous input was 0
- 1     previous input was 1
- $\perp$    previous input was dropped

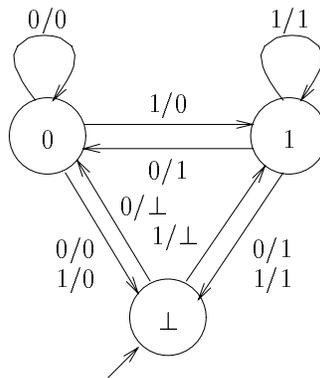


**Problem 3.** (30 points)

Draw a block diagram consisting of *and*, *or*, *not*, and *Delay* systems to implement the following state machine:

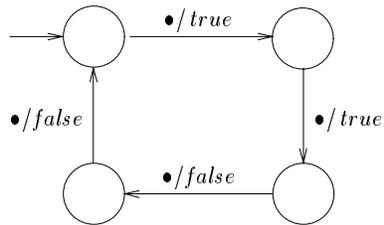


Solution:

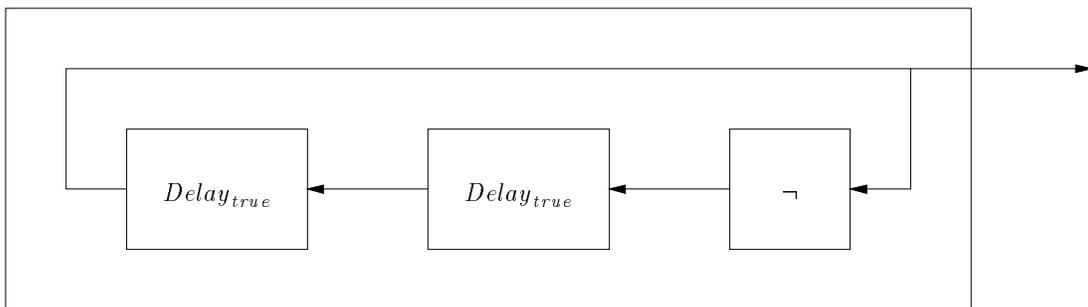

**Problem 4.** (20 points)

Use minimization to find the transition diagram of the smallest state machine that is equivalent to the following state machine:

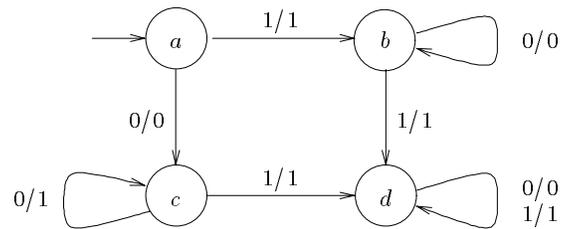

Splitting:

- $\{\{a, b, c, d\}\}$
- $\{\{c\}, \{a, b, d\}\}$
- $\{\{c\}, \{a\}, \{b, d\}\}$

